

KODIAK™

THE ULTIMATE POWER MACHINE

CHARGING THE KODIAK



150W / 8 hrs

11 hrs
4.5 hrs



Kodiak



Basecamp

INPUTS:

- A** (1) Charging Port 1 } Up to 270W/10 Amp 12 VDC max AC Adapter Solar
- B** (1) Charging Port 2 } High Current Charging Port for Solar, Wind, Car Up to 32 VDC at 30 amps, 600W Maximum.
- C** (1) External 12 VDC battery bank connection.

OUTPUT PORTS:

- D** (6) 110V AC Plugs Up to 1000W continuous per outlet (10 Amp max) 1500W max for combined AC output.
- E** (1) 30 amp RV plug, 110 Volt, NEMA TT-30R.
- F** (2) 12V DC universal car sockets, 15 amps maximum per socket.
- G** (4) USB outlets, 15W max per pair.
- H** (2) Base Camp LED port 50W max output per port, up to 10 Base Camp LED's, lights, daisy chained together.

BATTERY STORAGE INDICATOR

HANDLE & SHOULDER STRAP

POWER DISPLAY

CHARGE INDICATOR

CHARGE TIMES


- (11 hrs) Wall Charger: 110W
- (4.5 hrs) Car Charger: 240W
- (8 hrs) Solar: 3 Predator 50 Panels (150W)

BATTERY:

- Lithium Ion (NMC)
- 1100W continuous for 1 hour, 3000W peak (AC and DC combined)
- 12.6V DC, 90AH
- Up to 2000 charge cycles
- Up to 10 years shelf life
- Charge at least every 3 months or leave on charger
- Integrated charge balancer and controller
- Over charge protection and battery balancing

INVERTER:

- Pure Sine Wave, 1500 Watt Continuous, 3000 Watt Surge
- 110 VAC, 60Hz ± .5 Hz
- Ultra High Efficiency Design
- Super Cooled Chassis
- Operating Temperature Range, -15°F to 150°F

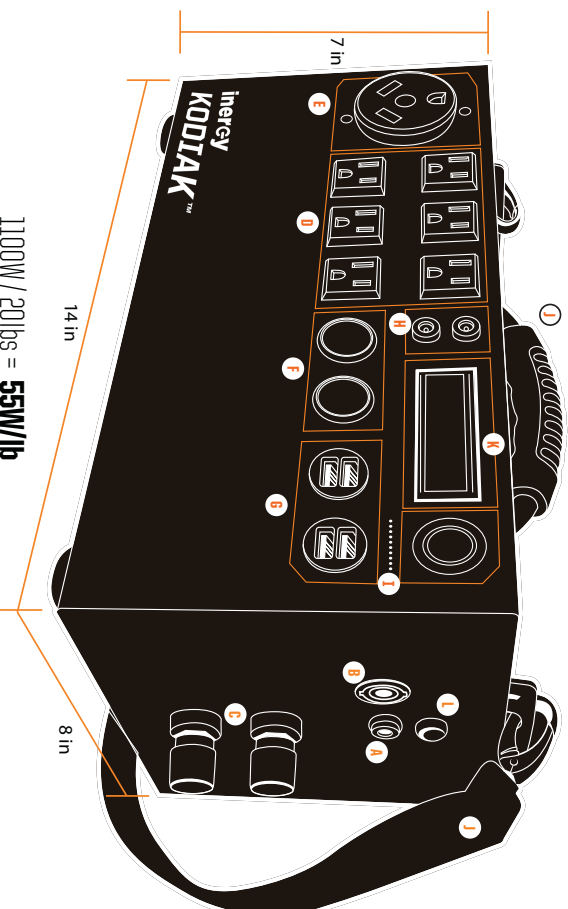

*WHAT THE KODIAK POWERS

Smartphone 150 + X	Tablet 30 X	Laptop 20 X	40" LED TV 25 hrs	Electric Blanket 14 hrs	Base Camp LED Light 180 hrs	CRAP Machine 20 hrs	7.1 cu ft. Freezer 48 hrs	16.5 cu ft. Refrigerator 30 hrs	1000 W Microwave 1 hr
-----------------------	----------------	----------------	----------------------	----------------------------	--------------------------------	------------------------	------------------------------	------------------------------------	--------------------------

Inergy Solar

620 Pheasant Ridge Drive
Chubbuck, Idaho 83202

www.inerysolar.com

info@inerysolar.com

877.969.2432

NOTE: Specifications subject to change without notice • Information on the specific makes and models referenced in our run time tests are available on our website • Due to variations in make, model, conditions, and settings, you may get different results.